

734

High Speed Fully-Automatic Random Sealer



Random Case Sealing

The Endoline 734 will automatically adjust its settings to close and seal 0201 cases throughout the case size range in any random sequence. The 734 can operate on small, large, lightweight or heavy cases at speeds of up to 20 cases per minute.



High Speed System

Includes scanning devices to determine the dimensions of the case being presented and automatically adjust head heights and guide widths to suit, thus enabling a throughput of 20 cases/minute.



Compact

The Endoline 734 can help increase factory space as multiple lines can feed into one machine. The 734 is well suited to environments where there is insufficient space for multiple sealers or there are regular case size changes.



Four Column Construction

Our unique four column design provides added stability for the taping bridge to ensure the machine runs smoothly at all times with minimal interruption and it provides the support necessary for the floating bridge feature. This fully automatic machine is fitted with two pairs of columns for additional support to the folding section.



Robust Construction

High quality components housed in a robust chassis ensure minimal servicing and enable 24 hour operation. Designed for the rigours of typical end-of-line packaging environments.



Low Cost of Ownership

All Endoline's machines are designed for maximum efficiency and productivity thereby reducing the cost of ownership to a minimum. This case sealer come sat a low capital cost and immediate savings can be seen through reduced labour costs and increased packing speeds.






734

Fully Automatic
Random Case Taper

Options include:

- Low tape and no tape sensing
- Visual/audible alarm
- Discharge blocked sensing
- Infeed conveyor
- No scan reject conveyor
- Automatic tapehead retract

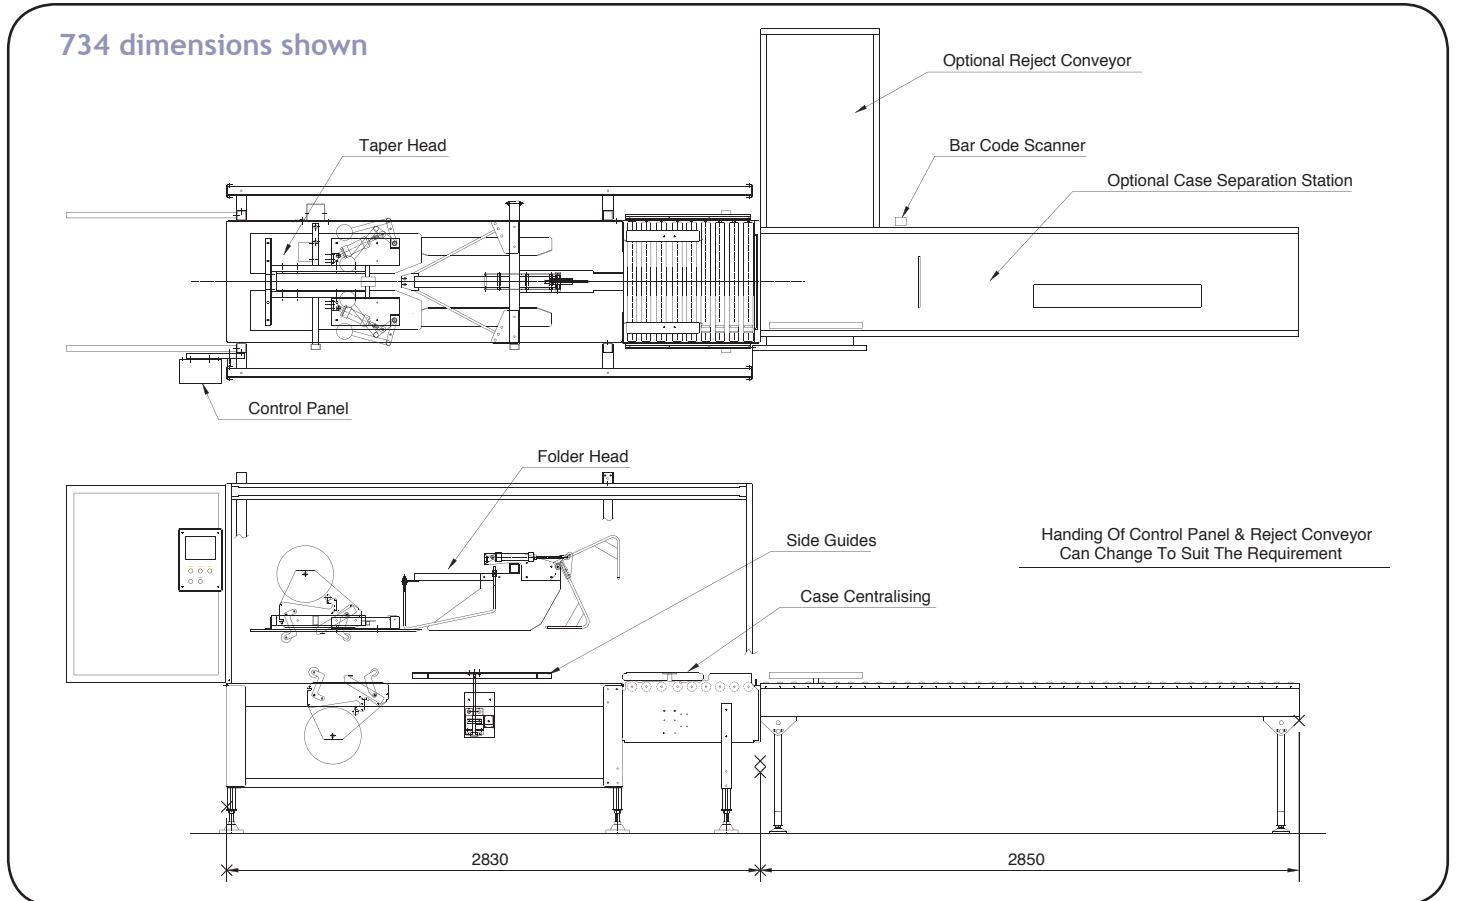

Case Dimensions (mm).

	Length	Width	Height (Closed)
Minimum	200	160 or 200	110 or 140 or 170
Maximum	600	460 or 500	510 or 540 or 570

Note:

- Speeds up to 20 cases per minute subject to case size.
- Machine can be modified for cases outside case size range. Please contact Endoline to advise.

Speed

- 18-20 cases per minute

Electrical Supply

- Three phase: 380-415V, 50Hz, 6amps per phase

Pneumatics

- Supply - 22litres per cycle at 5.5 bar

Machine Finish

- Mild steel, powder coated white (RAL9010) or stainless steel

Tape Size

- 38mm, 50mm, 75mm

© Endoline reserves the right to change specifications without prior notice.

Endoline Machinery Limited

Stratton Business Park, London Road Biggleswade, Bedfordshire SG18 8QB United Kingdom
Telephone: +44 (0) 1767 316422 Facsimile: +44 (0) 1767 318033 E-mail: sales@endoline-automation.com

